
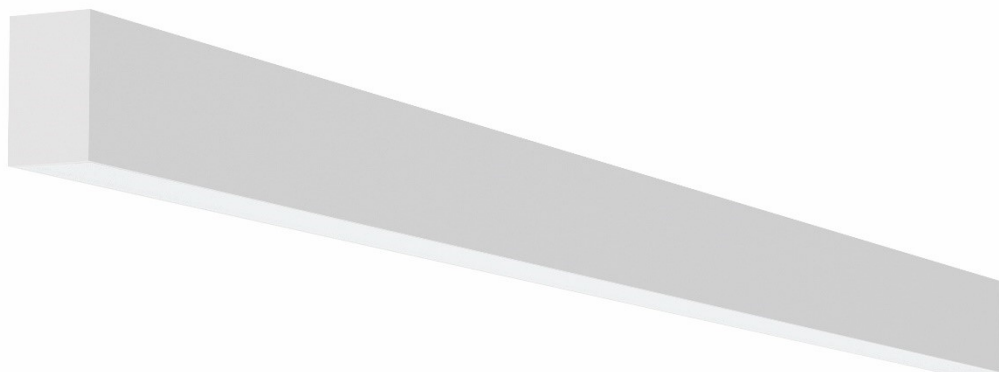


2SLICK surfaced single

led surfaced small line luminaire serie



2SLICK small profile design led surfaced luminaire serie

This narrow linear fixture has been designed as surface-mounted lighting for many applications. In addition to the standalone version, the 2SLICK construction is also made as line lighting including various illuminated corner pieces. The housing is made of extruded aluminum and can be supplied in no fewer than 24 standard RAL colors. It is also possible to provide the luminaires with a different colour in addition to this RAL colour. The standard dimensions vary between 600 mm and 3100 mm. Here too, it is possible to change the dimensions for your application. The luminaires are fitted with a satin or a microprismatic diffuser.

Benefits

- Design small design (40x65mm)
- Surfaced (also as line lighting)
- Various controls
- Easy to assemble
- 24 standard RAL colours

Applications

- Offices
- Schools
- Showrooms
- Corridors
- Meeting rooms
- Hotels



2SLICK surfaced single

led surfaced small line luminaire serie

Properties

Mounting	:	Ceiling (surfaced)
Optical system	:	Satin / microprismatic diffusor
Light distribution	:	Direct
Driver type	:	Standaard / DALI / Tunable White / SWITCH Tunable White / 1-10V / Casambi
Materialen	:	Diffusor: Satin PMMA
	:	Housing; Extruded aluminum
Heat control	:	Passive
Warranty	:	5 years

Technical information

Mains voltage	220 – 240V	Power factor	0.95
Frequency	50 – 60 Hz	Lifecycle	60.000 hours, L80/B10
IP protection	IP40	MacAdam	3 SDCM
Colour Rendering	80 Ra	Operating temperature	-20°C tot +35°C

2SLICK surfaced single

led surfaced small line luminaire serie

Technical specifications

Code	Module	Mounting	Driver	Colour temp. (Kelvin)	System power (Watt)	Dimensions (LxWxH) (mm)	Armatuur Output ¹ Ta= 25°C (lm)
SLS63S	600	surfaced	fix (on/off)	3000 (830)	13	529x40x65	887
SLS64S	600	surfaced	fix (on/off)	4000 (840)	13	592x40x65	944
SLS93S	900	surfaced	fix (on/off)	3000 (830)	17	872x40x65	1331
SLS94S	900	surfaced	fix (on/off)	4000 (840)	17	872x40x65	1416
SLS123S	1200	surfaced	fix (on/off)	3000 (830)	21	1152x40x65	1775
SLS124S	1200	surfaced	fix (on/off)	4000 (840)	21	1152x40x65	1888
SLS153S	1500	surfaced	fix (on/off)	3000 (830)	25	1432x40x65	2218
SLS154S	1500	surfaced	fix (on/off)	4000 (840)	25	1432x40x65	2360
SLS183S	1800	surfaced	fix (on/off)	3000 (830)	35	1722x40x65	2262
SLS184S	1800	surfaced	fix (on/off)	4000 (840)	35	1722x40x65	2832
SLS243S	2400	surfaced	fix (on/off)	3000 (830)	40	2282x40x65	3549
SLS244S	2400	surfaced	fix (on/off)	4000 (840)	40	2282x40x65	3776
SLS273S	2700	surfaced	fix (on/off)	3000 (830)	50	2710x40x65	4436
SLS274S	2700	surfaced	fix (on/off)	4000 (840)	50	2710x40x65	4720
SLS313S	3100	surfaced	fix (on/off)	3000 (830)	60	3110x40x65	4480
SLS314S	3100	surfaced	fix (on/off)	4000 (840)	60	3110x40x65	5192
SLS63SD	600	surfaced	DALI	3000 (830)	13	529x40x65	887
SLS64SD	600	surfaced	DALI	4000 (840)	13	592x40x65	944
SLS93SD	900	surfaced	DALI	3000 (830)	17	872x40x65	1331
SLS94SD	900	surfaced	DALI	4000 (840)	17	872x40x65	1416
SLS123SD	1200	surfaced	DALI	3000 (830)	21	1152x40x65	1775
SLS124SD	1200	surfaced	DALI	4000 (840)	21	1152x40x65	1888
SLS153SD	1500	surfaced	DALI	3000 (830)	25	1432x40x65	2218
SLS154SD	1500	surfaced	DALI	4000 (840)	25	1432x40x65	2360
SLS183SD	1800	surfaced	DALI	3000 (830)	35	1722x40x65	2262
SLS184SD	1800	surfaced	DALI	4000 (840)	35	1722x40x65	2832
SLS243SD	2400	surfaced	DALI	3000 (830)	40	2282x40x65	3549
SLS244SD	2400	surfaced	DALI	4000 (840)	40	2282x40x65	3776
SLS273SD	2700	surfaced	DALI	3000 (830)	50	2710x40x65	4436
SLS274SD	2700	surfaced	DALI	4000 (840)	50	2710x40x65	4720
SLS313SD	3100	surfaced	DALI	3000 (830)	60	3110x40x65	4480
SLS314SD	3100	surfaced	DALI	4000 (840)	60	3110x40x65	5192

¹ This output is with satin diffusor

2SLICK surfaced single

led surfaced small line luminaire serie

Options


Tunable White / SWITCH Tunable White / 1-10V / Casambi

Emergency

RAL colours, see colour chard



Flexibility; ask us for other colours, sizes, colour temperature and other wishes

RAL colour chard



* standaard

Technical drawing

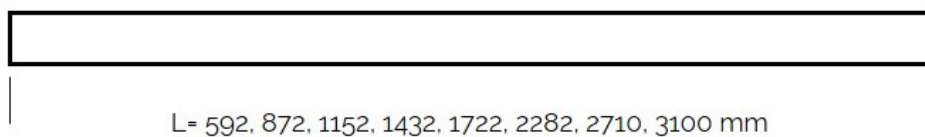

2SLICK surfaced single

led surfaced small line luminaire serie


Additional information

All Photometric data is supplied in EULUMDAT (.ldt) format so it can be used in DIALUX or RELUX lighting design software. Request this from the sales office or download it at our website.

Website: [2SLICK surfaced single serie](#)

2SLICK surfaced single

led surfaced small line luminaire serie

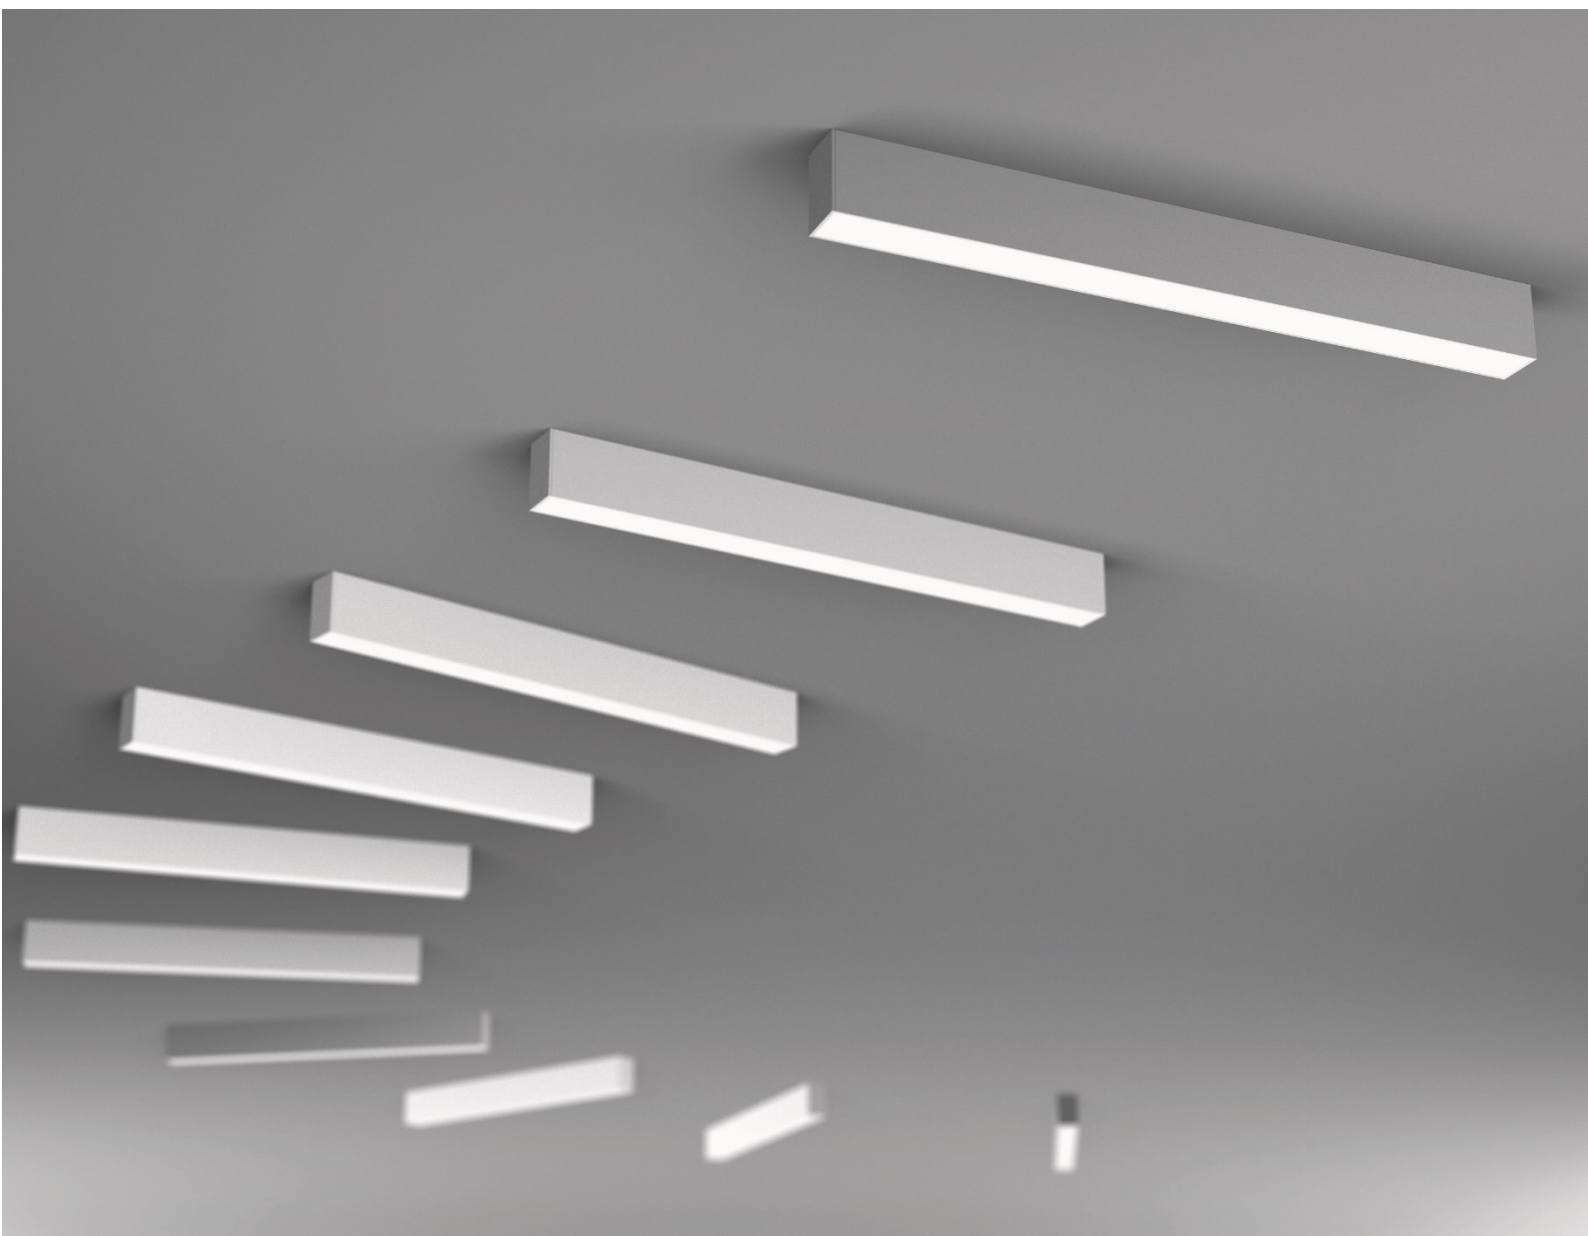

Lumosec Lighting

Touwslagersweg 12-A3

3449 HX Woerden

Tel. 0031 (0)85 401 73 95

E info@lumosec.com

W www.lumosec.com